


14.5kW 3-Phase Switched PDU, LX Interface, 208/240V Outlets (24 C13/6 C19), LCD, IEC 309 60A Blue, 1.8m/6 ft. Cord, 0U 1.8m/70 in. Height, TAA

MODEL NUMBER: PDU3EVSR6G60

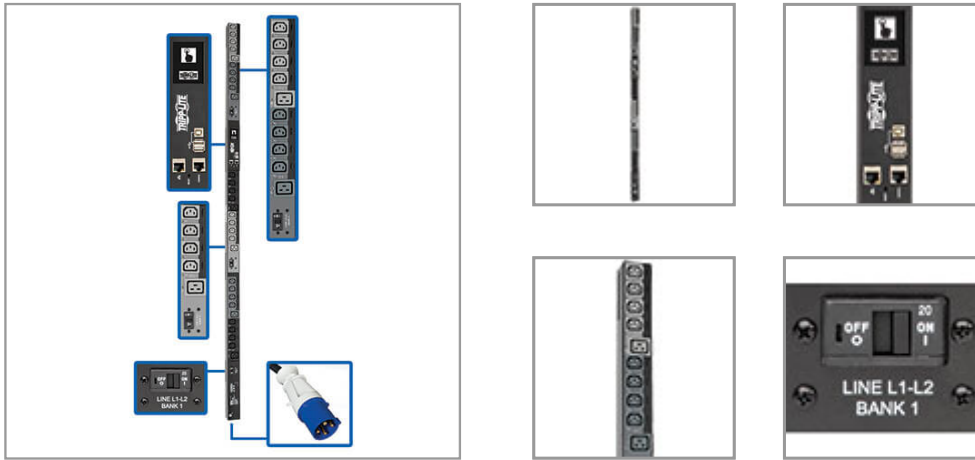

14.5kW 3-phase PDU with multi-function touchscreen LCD distributes, monitors and manages AC power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDU3EVSR6G60 14.5kW 3-Phase Switched Power Distribution Unit provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. By reducing the frequency of on-site visits, these advanced remote capabilities can save you money and reduce downtime.

The 0U PDU features 30 switched outlets (24 C13 and 6 C19) with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A six-foot cord with IEC 309 60A Blue plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet, SSH, or CLI. It supports 10/100/1000 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase, output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the switchable PDU through a mobile device.

Features

Distributes, Monitors and Manages Network-Grade AC Power 14.5kW 208/240V switched PDU with 3-phase input Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components IEC 309 60A Blue plug with 6 ft. cord connects to compatible AC power source Firmware upgrades support future product enhancements
30 Switched Outlets Distribute AC Power 24 C13 and 6 C19 outlets split into 3 separately breakered load banks Individual outlets can be remotely controlled to power up, power down, reboot or lock out

Highlights

- 14.5kW 208/240V 3-phase switched 1.8-meter 0U PDU
- 30 individually controllable outlets—24 C13, 6 C19
- Built-in LX Platform interface for remote access 24/7
- IEC 309 60A Blue PDU input with 6 ft. AC power cord
- Touchscreen LCD with mobile access option via QR code
- To enable the Auto Probe feature, this product requires LX firmware update 15.5.2 or later to be installed

Package Includes

- PDU3EVSR6G60 14.5kW 3-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (30) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



devices Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

Color Touchscreen LCD Reports network data, including IP address, input current level per phase, and output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

Built-In LX Platform Interface Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, telnet, SSH, or CLI Supports 10/100/1000 Mbps auto-sensing for communication with an Ethernet network Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities No Java required

Reduce Service Calls with Auto Probe Autonomous Device Management The Auto Probe feature (Firmware 15.5.2 and greater) checks the connectivity status of any networked device and automatically takes one or more user-configured actions if the device fails to respond; actions include outlet reboot, set SNMP traps, SNMP OID sets, and even script execution when used in conjunction with the Tripp Lite PowerAlert Network Shutdown Agent (PANSA)

Broad Communications Compatibility Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP Supports automatic and manual assignment of IP address

Easy 0U Installation in EIA-Standard 19 in. Racks Mounts vertically using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

OVERVIEW	
UPC Code	037332212863
PDU Type	Switched
OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Capacity Details	14.5kW (240V), 12.6kW (208V) total capacity; 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet
Output Receptacles	(24) C13; (6) C19
Output Nominal Voltage	208; 240
Overload Protection	3 20A circuit breakers, 1 per outlet bank
Customized Load Management Receptacles	Each outlet is individually controllable
INPUT	
PDU Input Voltage	208; 240
Recommended Electrical Service	60A 208V with IEC309 60A Blue (3P+E) outlet
Maximum Input Amps	35
PDU Plug Type	IEC-309 60A BLUE (3P+E)
Input Phase	3-Phase
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
USER INTERFACE, ALERTS & CONTROLS	



Reported Load Segments	Reports input current per phase (L1, L2, L3), plus output current for each output load bank (20A balanced max per banks B1-B3) and individual output receptacle (1-30); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds light-gray outlets (B1); L2-L3 feeds black outlets (B2); L3-L1 feeds dark-gray outlets (B3)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), OUTLET DATA (Amperage, Wattage per outlet), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Front Panel LEDs	One LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Power OFF/undervoltage), RED FLASHING (Power OFF/breaker trip), LED OFF (Power OFF). Network Activity (Green): Flashes for network activity. Link/Network Speed (Yellow): On steady for any speed.
Switches	LX Platform Interface: Recessed reset switch for interface reboot and factory reset
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
PHYSICAL	
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
Material of Construction	Metal
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	17.50 x 24.51 x 192.71
Shipping Dimensions (hwd / in.)	6.89 x 9.65 x 75.87
Shipping Weight (kg)	12.28
Shipping Weight (lbs.)	27.08
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 7.3
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.86
Unit Weight (kg)	9.08
Unit Weight (lbs.)	20.01
ENVIRONMENTAL	
Operating Temperature Range	32 to 122F (0 to 50C)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0 - 3000 m
COMMUNICATIONS	



Communications Interface	Pre-installed network card; RS-232; USB
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager15 (PADM15)
Communications Cable	USB B-to-USB A Configuration/Console Access cable
Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access)
SNMP Compatibility	SNMP V1, V2c, V3
Network Speed	10/100 Mbps; 1Gbps
CERTIFICATIONS	
Certifications	Tested to UL60950-1: 2007 R10.14 (USA), CAN/CSA-C22.2 NO. 60650-1-07+A1: 2011+A2: 2014 (Canada), FCC Class A Part 15 (Emissions), NOM (Mexico), RoHS compliant, TAA Compliant
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2019 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>