


2-Port DB9 (RS-232) Serial PCI Card with 16550 UART, Low Profile

MODEL NUMBER: **PCI-D9-02-LP**

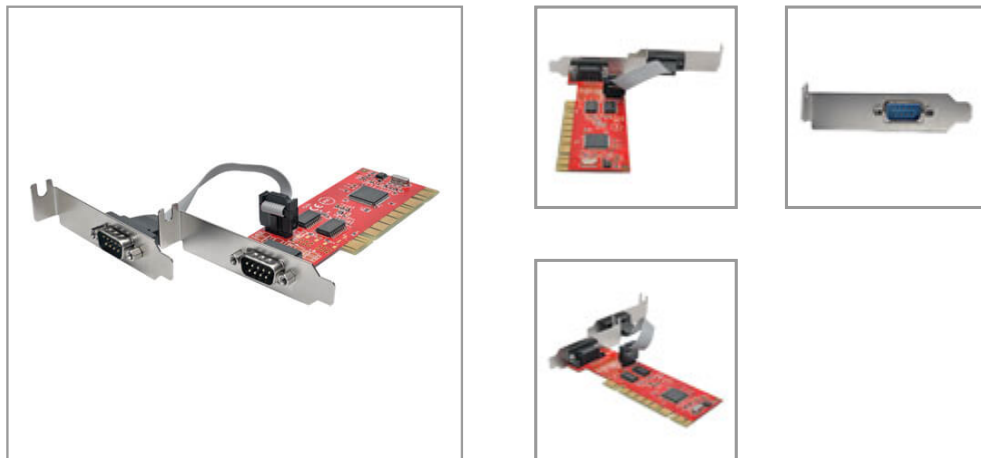

Adds 2 DB9 serial ports to your PCI computer or server or replaces existing DB9 ports. Low-profile bracket is designed for shorter computer cases.

Description

The PCI-D9-02-LP 2-Port DB9 Serial PCI Card adds two DB9 serial ports to your computer or server. By adding the PCI-D9-02-LP to a computer with no DB9 ports or not enough of them, you can upgrade your DB9 capability without having to buy a new computer.

Perfect for home or office, the PCI-D9-02-LP supports data transfer rates up to 115.2 Kbps on each port. It easily installs inside your computer in just a few minutes. The low-profile bracket's interface is compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots. Allow the appropriate drivers to automatically install on your hard drive (a driver CD is included if they don't), and connect DB9 serial extension cables (such as Tripp Lite's P520-006) to the card's DB9 connectors.

The PCI-D9-02-LP is fully compliant with PCI Local Bus Specification Revision 2.3 and compatible with industrial standard 16550 UART. On-chip 256-byte depth FIFO in transmit and receive paths of each port. Supports hardware and software flow control; PCI IRQ sharing and PCI power management; 5-, 6-, 7-, 8- and 9-bit serial formats; Even, Odd, None, Space and Mark parity; and 1- or 2-stop bit operation.

Features

Adds 2 DB9 (RS-232) Serial Ports to Your Computer

- Upgrades your DB9 capability without buying a new computer or server
- Each port supports data transfer rates up to 115.2 Kbps
- Perfect for home or office use
- Low-profile bracket to fit shorter cases

Easy to Install Inside Your Computer

Highlights

- Each port supports data transfer rates up to 115.2 Kbps
- Complies with PCI Local Bus Specification Revision 2.3
- Compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots
- Compatible with industrial standard 16550 UART
- Works with Windows® and Linux®

System Requirements

- Computer with available universal 3.3V and 5V 32-bit PCI/PCI-X slot
- Windows (XP and later) or Linux (2.6.x and later)

Package Includes

- PCI-D9-02-LP 2-Port DB9 Serial PCI Card with 16550 UART, Low Profile
- Driver CD
- Owner's manual



- Compatible with universal 3.3V and 5V 32-bit PCI/PCI-X slots
- Appropriate drivers install to your hard drive automatically

Loaded with the Latest Features

- Complies with PCI Local Bus Specification Revision 2.3
- Compatible with industrial standard 16550 UART
- On-chip 256-byte depth FIFO in transmit and receive paths of each port
- Supports hardware and software flow control
- Supports PCI IRQ sharing and PCI power management
- Supports 5-, 6-, 7-, 8- and 9-bit serial formats
- Supports Even, Odd, None, Space and Mark parity
- Supports 1- or 2-stop bit operation

Specifications

OVERVIEW	
UPC Code	037332193698
INPUT	
Cable Length (ft.)	0
Cable Length (m)	0
PHYSICAL	
Shipping Dimensions (hwd / in.)	1.00 x 5.00 x 5.80
Shipping Dimensions (hwd / cm)	2.54 x 12.70 x 14.73
Shipping Weight (lbs.)	0.20
Shipping Weight (kg)	0.09
Color	Red
CONNECTIONS	
Ports	2
FEATURES & SPECIFICATIONS	
Technology	Serial (RS232)
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

© 2019 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:
<https://www.tripplite.com/products/product-certification-agencies>