


## SNMP Webcard, Remote Monitoring/Control, SmartPro or SmartOnline UPS Systems (Firmware version 12.04.0055)

MODEL NUMBER: **SNMPWEBCARD55**

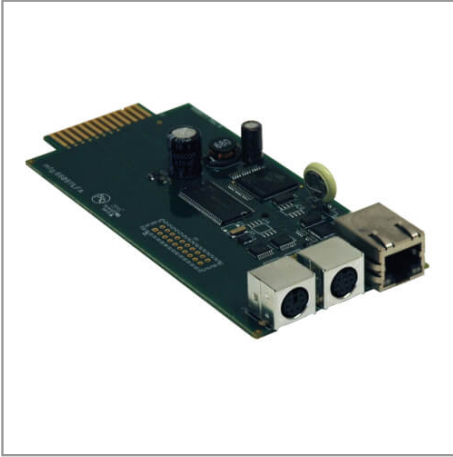

### Description

Tripp Lite's SNMPWEBCARD55 allows network users to operate any expansion slot-equipped Tripp Lite SmartPro or SmartOnline UPS as a managed device on the network. Enables remote monitoring and control of UPS and site electrical conditions using the SNMP network management platform or a web browser. Provides remote viewing of site electrical data, UPS status information and self-test logs. Supports selective rebooting of locked network equipment without disrupting power to other devices when used with customized load management receptacles available on select Tripp Lite UPS systems. Optional ENVIROSENSE module provides remote temperature/humidity monitoring and a dry contact interface to control and monitor alarm, security and telecom devices.

### Features

- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases
- Contains firmware version 12.04.0055
- Makes any slot-equipped Tripp Lite UPS a managed device on the network, controllable using SNMP network management platforms or a web browser
- Web interface provides remote viewing of current site electrical data, UPS self-test and alert logs, as well as logged power events such as blackouts, brownouts, overvoltages, and other electrical problems
- Offers the ability to control UPS output power and remote reboot of locked network devices without interrupting power to other loads when used with any Tripp Lite UPS equipped with load management receptacles
- DHCP/Manual configuration support provides the ability to have network settings automatically assigned to the card, or manually assigned via permanent IP addresses
- 10/100 Mbps auto-sensing optimizes communication within 10/100 Base-T networks
- Real-time clock support maintains the time of day and date even if the UPS is shut down
- NTP (Network Time Protocol) support gives the card the ability to receive automatic updates to its real-time clock from a NTP server
- 2-tier access allows an administrator and a guest to log into the web browser for monitoring and/or management of slot-equipped Tripp Lite UPS systems
- Multiple user support allows for viewing by a number of users at the same time
- Full Telnet access provides the ability to remotely monitor and manage the UPS system via a TELNET session

### Highlights

- Contains firmware version 12.04.0055
- Data and event logging; Supports SNMPv1, v2c, and v3 gets, sets and walks
- Remote Syslog support for capturing data and events, event actions and individual outlet events
- Terminal Interface allows control and configuration through a network SSH or Telnet client; RSS feeds for Active Alarms, Event, and Data logs
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

### System Requirements

- Tripp Lite UPS/PDU with SNMPWEBCARD firmware version 12.04.0055
- FTP utility
- Web browser

### Package Includes

- SNMPWEBCARD55
- Quick Start Installation Guide
- Configuration Cable
- Cover Plates (secures card in UPS/PDU system's SNMP accessory slot)
- Software CD



Powering Business Worldwide



- Optional SSL (Secure Socket Layer) security setting provides the ability to create an encrypted connection to the card via a web browser
- Offers the ability to shut down remote operating systems through the network. (Supported operating systems must have PowerAlert Network Shutdo installed. See PowerAlert section for software support)
- Alert notifications via email or SNMP traps give users the added advantage of having an immediate event notification sent to them as a result of a site electrical or UPS problem
- RSS feeds for Active Alarms, Event logs, and Data logs
- Protocols supported include HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2c, SNMPv3, Telnet, SSH, FTP, DHCP
- RoHS Compliant

## Specifications

OVERVIEW	
UPC Code	037332099419
PHYSICAL	
Shipping Dimensions (hwd / in.)	3.00 x 6.40 x 6.90
Shipping Dimensions (hwd / cm)	7.62 x 16.26 x 17.53
Shipping Weight (lbs.)	0.70
Shipping Weight (kg)	0.32
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard  
 Cleveland, OH 44122  
 United States  
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.  
 Eaton is a registered trademark. All other trademarks  
 are the property of their respective owners.