

Portable AC Unit for Server Rooms - 12,000 BTU (3.5 kW)

(SRCOOL12KE - Black, SRCOOL12KWTE - White)



12,000
BTU



R32
Refrigerant



Effective
Spot Cooling



Zero-
Maintenance
Design




Filters and
Dehumidifies
Air




Intuitive
LCD Screen

- A** Control Panel
- B** Communications Port
(located in recessed handle)
- C** Air Filter Covers
- D** Drainage Outlet
- E** Casters
- F** Front Panel
- G** Cool Air Output
- H** Louvered Vent Insert
(pre-installed)
- I** Cool Air and Warm Air
Duct Adapters
(Qty 2 included)
- J** Rear Panel
- K** Warm Air Exhaust
- L** Evaporator Drainage Outlet
- M** Evaporator Filter
- N** Condenser Filter

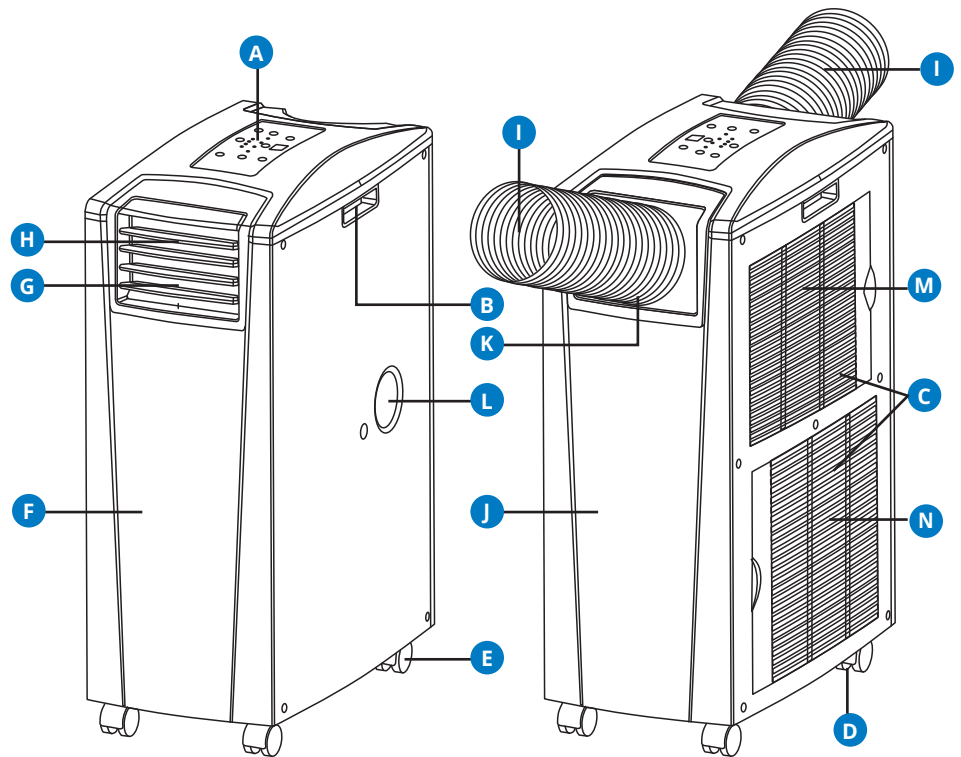


Control Panel

- O** "POWER" Button
- P** "FUNCTION" Button
- Q** "TIMER" Button
- R** "FAN SPEED" Button
- S** "QUIET" Button
- T** Temperature Control Buttons
- U** Numeric Display
- V** Operating Mode LEDs
- W** Fan Speed Mode LEDs

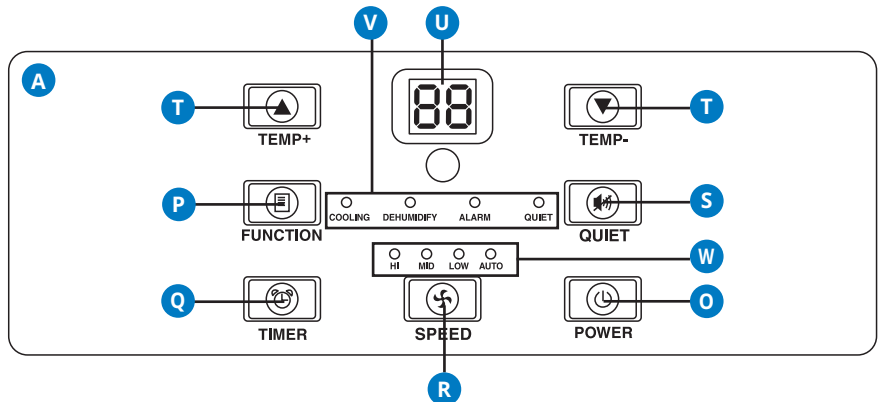

Powering Business Worldwide

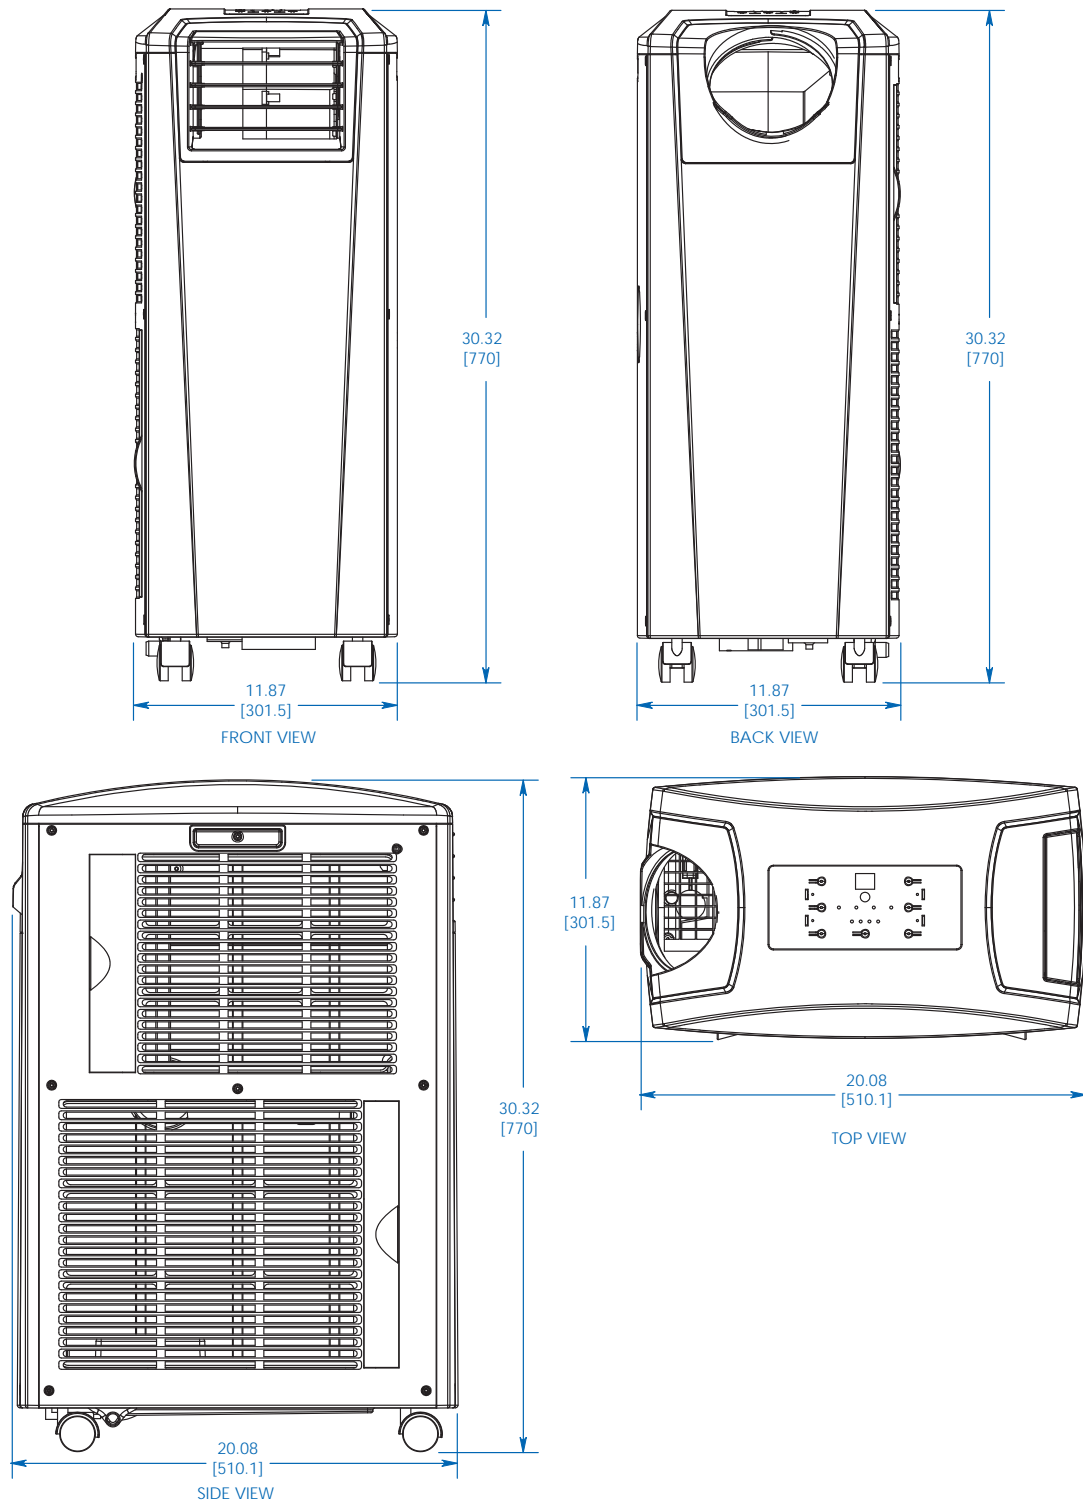

Dimensions: INCHES [mm]

Learn more at [Tripplite.Eaton.com](https://www.Tripplite.Eaton.com)



Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2025 Eaton
All Rights Reserved
Publication No. 24-11-148
February 2025

No part of this document may be reproduced in any way without the express written approval of Eaton.

Eaton reserves the right to change specifications without prior notice. Eaton is a registered trademark of Eaton. All other trademarks are properties of their respective companies.

Follow us on social media to get the latest product and support information.

