


DIN Rail-Mounting Bracket for Digital Signage, Version 1 - 41 mm mounting distance

MODEL NUMBER: **B110-DIN-01**

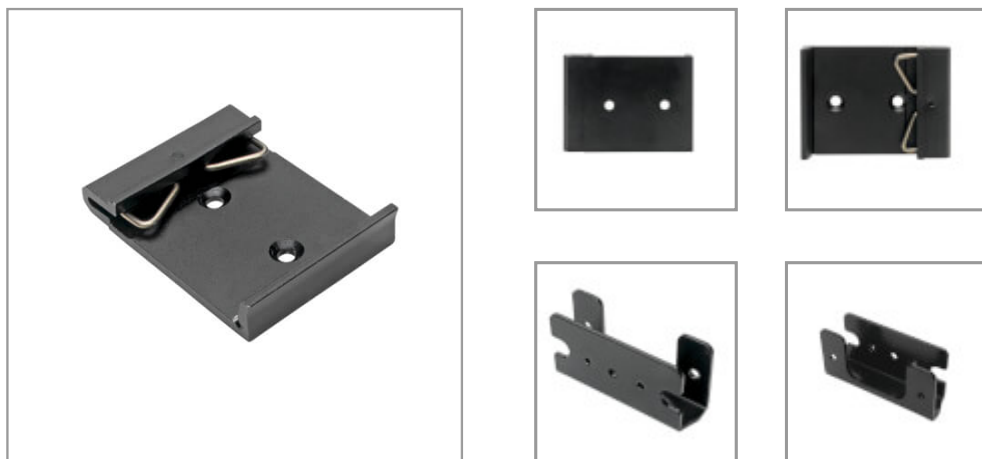

DIN rail bracket securely mounts select Tripp Lite extenders and other digital signage devices to a standard 35 mm DIN rail.

Features

DIN Mounting Bracket Ideal for Attaching Your Digital Signage Components to a DIN Rail This black aluminum DIN bracket is designed for securely mounting splitters, extenders and other select digital signage devices to any standard 35 mm DIN rail. Consisting of a durable U bracket and rail clip, the B110-DIN-01 firmly attaches to both lips of the DIN rail to prevent your mounted equipment from being jostled and connected cables from coming loose. It's an ideal accessory for setting up a digital signage system in restaurants, offices, banks, hotels, schools, doctor's offices and a wide range of retail establishments.

Simple Mounting Process Takes Just a Few Minutes Just use the included screws to attach the aluminum U bracket to the compatible device. Attach the aluminum rail clip to the bracket, and securely mount the unit on a 35 mm DIN rail, making sure the spring goes over the rail's top lip.

Compatible with a Wide Range of Digital Signage Devices This DIN rail-mounting bracket attaches to units with mounting holes spaced 41 millimeters apart. Select equipment includes the B126-Series, B130-Series, B140-Series and BHDBT-Series of transmitters, receivers and extenders.

Lifetime Warranty The B110-DIN-01 is backed by a lifetime warranty, ensuring reliability and performance.

Specifications

OVERVIEW	
UPC Code	037332213907
Accessory Type	Mounting Bracket
Technology	A/V over IP
Accessory Class	Audio Video Accessories

Highlights

- Durable U bracket and rail clip mount firmly to any standard 35 mm DIN rail
- Holds digital signage device securely in place to prevent unwanted movement
- Easy to mount in just a few minutes, so you can get your system up and running quickly
- Fits digital signage components with mounting holes spaced 41 mm apart
- Includes all necessary mounting hardware for immediate DIN rail installation

Applications

- Mount a Tripp Lite transmitter, receiver or extender to a 35 mm DIN rail in a digital signage system

System Requirements

- Select digital signage device, including B126-, B130-, B140- and BHDBT-Series

Package Includes

- U bracket
- DIN rail clip
- (2) DIN rail screws
- (2) M3 x 5 mm mounting screws
- Installation guide



Powering Business Worldwide



PHYSICAL	
Color	Black
Material of Construction	Aluminum
Rackmountable	No
Shipping Dimensions (hwd / in.)	4.72 x 3.14 x 0.98
Shipping Dimensions (hwd / cm)	12.00 x 8.00 x 2.50
Shipping Weight (lbs.)	0.17
Shipping Weight (kg)	0.08
Unit Packaging Type	Box
FEATURES & SPECIFICATIONS	
IP68 Rated	No
IP20 Rated	No
Driver Required	No
STANDARDS & COMPLIANCE	
Product Compliance	RoHS; REACH
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	Lifetime limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.