


10kW 200-240V 3PH Monitored PDU - LX Interface, Gigabit, 48 Outlets, L15-30P, LCD, 1.8 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: PDU3EVN6L1530B

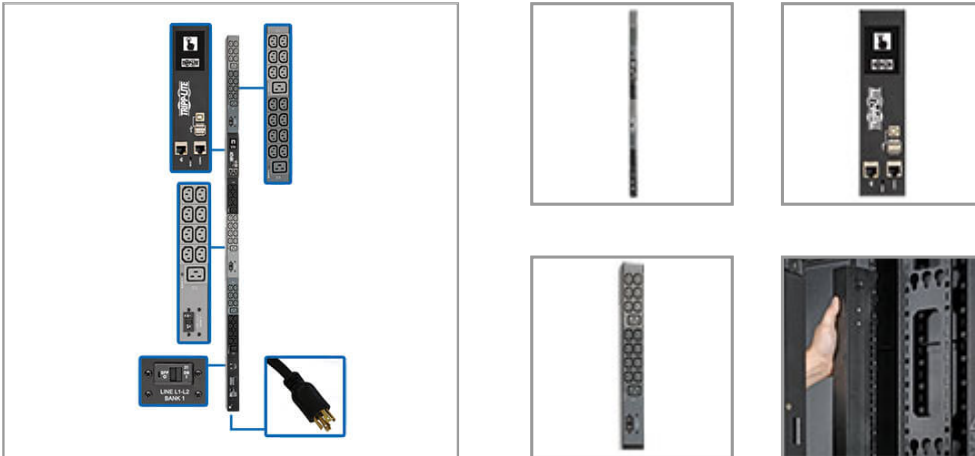

Distributes AC power and remotely monitors load levels to prevent overloads that can cause costly downtime in an IT or industrial environment.

Description

The PDU3EVN6L1530B 10kW 3-Phase Monitored PDU provides real-time remote monitoring of voltage, frequency and load levels via built-in network connection.

Recommended for IT and industrial applications, this PDU features 42 C13 and 6 C19 receptacles with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 6-ft. (1.83 m) cord with NEMA L15-30P input plug connects the 3-phase PDU to a compatible AC power source, generator or protected UPS.

The 0U PDU mounts vertically in racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase and output current per load bank with $\pm 1\%$ billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the PDU through a mobile device.

The Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. DHCP/Manual configuration lets you assign network settings to the card automatically, reducing the need for manual configuration. Automated alerts help prevent accidental overloads, power loss and downtime. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities, including temperature and humidity conditions.

Features

Distributes and Monitors Network-Grade AC Power 10kW 200-240V monitored PDU with 3-phase input NEMA L15-30P plug with 6-ft. (1.83 m) cord connects to compatible AC power source
Firmware upgrades support future product enhancements

48 Outlets Distribute AC Power 42 C13 and 6 C19 split into 3 separately breakered load banks
Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

Color Touchscreen LCD Reports network data, including IP address, input current level per phase and output current per load bank with $\pm 1\%$ billing-grade accuracy
Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device
Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

Highlights

- 10kW 200-240V 3-phase Gigabit Ethernet-capable 0U monitored PDU
- 42 C13 and 6 C19 receptacles with plug-lock inserts
- Touchscreen LCD with mobile access option via QR code
- NEMA L15-30P input with 1.8 m power cord
- Pre-installed GbE-capable WEBCARDLX with latest version of PADM20 for enhanced remote management

Applications

- Power mission-critical rack equipment in a data center, computer room or high-density network closet in a government, commercial or industrial facility
- Monitor power loads from various computers, switches, servers and other networking equipment

Package Includes

- PDU3EVN6G30B 10kW 3-Phase Monitored PDU
- Configuration cable
- (48) Plug-lock insert sleeves
- PDUMVROTATEBRKT mounting bracket accessory
- Rack-mounting hardware
- Owner's manual

Built-In GbE-Capable LX Interface Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities. PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations.

Broad Communications Compatibility Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP. Supports automatic and manual assignment of IP address.

Easy 0U Installation in EIA-Standard 19 in. Racks Mounts vertically using included toolless buttons or rack-mounting brackets. Included PDUMVROTATEBRKT allows mounting with rear-facing outlets.

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases.

Specifications

OVERVIEW	
UPC Code	037332195357
PDU Type	Monitored
INPUT	
PDU Input Voltage	200; 208; 220; 230; 240
Recommended Electrical Service	Three-phase 30A 200-240V service
Maximum Input Amps	24
Maximum Input Amps Details	Agency de-rated to 24A continuous
PDU Plug Type	NEMA L15-30P
Input Phase	3-Phase
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
OUTPUT	
Output Capacity Details	10kW (240V), 9.6kW (230V), 9.1kW (220V), 8.6kW (208V), 8.3kW (200V) total capacity; 13.9A max per breaker outlet bank; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(42) C13; (6) C19
Output Nominal Voltage	200-240V
Overload Protection	3 20A circuit breakers, one per output load bank
USER INTERFACE, ALERTS & CONTROLS	
Reported Load Segments	Reports input current per phase (L1, L2, L3) and output current for each breaker outlet bank (13.9A balanced max per banks B1-B3); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black outlets (B1); L2-L3 feeds dark-gray outlets (B2); L3-L1 feeds light-gray outlets (B3)

Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	6.30 x 9.70 x 75.70
Shipping Dimensions (hwd / cm)	16.00 x 24.64 x 192.28
Shipping Weight (lbs.)	23.00
Shipping Weight (kg)	10.43
Unit Dimensions (hwd / in.)	70.000 x 2.170 x 2.860
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 7.3
Unit Weight (lbs.)	14.93
Unit Weight (kg)	6.77
ENVIRONMENTAL	
Operating Temperature Range	0C ~ 50C (32F ~ 122F)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5-95% non condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
COMMUNICATIONS	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager
Communications Cable	USB B-to-USB A Configuration/Console Access cable
Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access)

SNMP Compatibility	Pre-installed LX platform network interface
Network Compatibility	10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit)
FEATURES & SPECIFICATIONS	
High Availability PDU Features	Remote Network Notifications
STANDARDS & COMPLIANCE	
Product Certifications	CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1
Product Compliance	RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA)
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty