


25.2kW 3-Phase Switched PDU, LX Platform Interface, 220-240V Outlets (24 C13/6 C19), Touchscreen LCD, IEC 309 60A Red 380-415V Input, 0U, TAA

MODEL NUMBER: PDU3XEVS6G60B

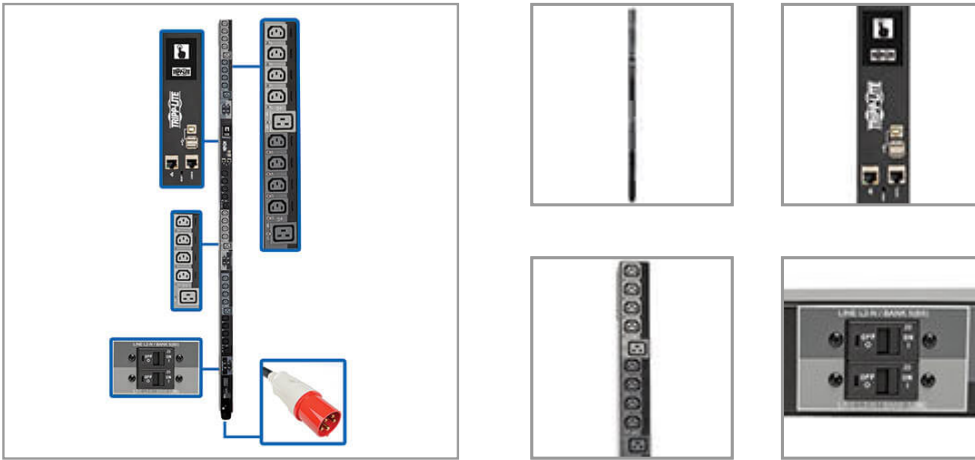

25.2kW 3-phase PDU with multi-function touchscreen LCD distributes, monitors and manages AC power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDU3XEVS6G60B 25.2kW 3-Phase Switched Power Distribution Unit provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. By reducing the frequency of on-site visits, these advanced remote capabilities can save you money and reduce downtime.

The 0U PDU features 30 switched 220-240V outlets (24 C13 and 6 C19) with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 1.8-meter (six-foot) cord with IEC 309 60A Red 380-415V plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2c, SNMPv3, Telnet, SSH, CLI, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase, output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the switchable PDU through a mobile device.

Features

Distributes, Monitors and Manages Network-Grade AC Power 25.2kW 380-415 input / 220-240V switched PDU with 3-phase input Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components IEC 309 60A Red 380-415V plug with 1.8m (6 ft.) cord connects to compatible AC power source Firmware upgrades support future

Highlights

- 25.2kW 220-240V 3-phase switched 1.8m 0U PDU
- 30 individually controllable outlets—24 C13, 6 C19
- Pre-installed WEBCARDLX with latest version of PADM20 for IP-based Auto Probe feature
- IEC 309 60A Red 380-415V PDU input with 1.8m AC power cord
- Touchscreen LCD with mobile access option via QR code

Package Includes

- PDU3XEVS6G60B 25.2kW 3-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (30) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



product enhancements

30 Switched 220-240V Outlets Distribute AC Power 24 C13 and 6 C19 outlets split into 6 separately breakered load banks Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

Color Touchscreen LCD Reports network data, including IP address, input current level per phase, and output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device Full access available by logging into PowerAlert Device Manager via browser as user with read/write credentials

Built-In LX Platform Interface Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations IP-based Auto Probe detects lost connectivity and restores service autonomously

Essential Safety Features Tiered access allows administrator and guest to log in via web browser Immediate alert notifications via email or SNMP traps Supports user-specified alarm notification thresholds Real-time clock backup maintains day/date even if PDU is unpowered

Easy 0U Installation in EIA-Standard 19 in. Racks Mounts vertically using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

OVERVIEW	
UPC Code	037332195425
PDU Type	Switched
INPUT	
PDU Input Voltage	380-415V
Recommended Electrical Service	Three-phase 60A 380-415V service
Maximum Input Amps	35
PDU Plug Type	IEC-309 60A RED (3P+N+E)
Input Phase	3-Phase
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
OUTPUT	
Output Capacity Details	25.2kW (415/240V), 24.3kW (400/230V), 23kW (380/220V) total capacity; 35A max per output phase (L1, L2, L3); 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(24) C13; (6) C19
Output Nominal Voltage	220-240V
Overload Protection	6 20A breakers protect 4 C13 and 1 C19 outlet each
USER INTERFACE, ALERTS & CONTROLS	



Reported Load Segments	Reports input current per phase (L1, L2, L3), plus output current for each output load bank (B1-B6) and individual output receptacle (1-30); Outlets are color-coded and labeled for phase and load bank identification; L1-N feeds black outlets (B1, B4); L2-N feeds dark-gray outlets (B2, B5); L3-N feeds light-gray outlets (B3, B6)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), OUTLET DATA (Amperage, Wattage per outlet), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Front Panel LEDs	One LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Power OFF/undervoltage), RED FLASHING (Power OFF/breaker trip), LED OFF (Power OFF). Network Activity (Green): Flashes for network activity. Link/Network Speed (Yellow): On steady for any speed.
Switches	LX Platform Interface: Recessed reset switch for interface reboot and factory reset
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
PHYSICAL	
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
Material of Construction	Metal
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	17.50 x 24.51 x 192.71
Shipping Dimensions (hwd / in.)	6.89 x 9.65 x 75.87
Shipping Weight (kg)	11.93
Shipping Weight (lbs.)	26.30
Unit Dimensions (hwd / cm)	177.8 x 5.51 x 6.4
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.52
Unit Weight (kg)	8.66
Unit Weight (lbs.)	19.1
ENVIRONMENTAL	
Operating Temperature Range	0C ~ 50C (32F ~ 122F)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5% to 95% non-condensing
COMMUNICATIONS	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager15 (PADM15)
Communications Cable	USB B-to-USB A Configuration/Console Access cable



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access)
SNMP Compatibility	SNMP V1, V2c, V3
Network Speed	10/100 Mbps; 1Gbps
Communications Interface	Pre-installed network card; RS-232; USB
SPECIAL FEATURES	
High Availability PDU Features	Auto Probe Monitoring and Reboot (included)
STANDARDS & COMPLIANCE	
Certifications	Tested to UL60950-1: 2007 R12.11, IEC 60950-1: 2005+A1:2009 (USA), CAN/CSA-C22.2 NO. 60950-1-07+A1: 2011 (Canada), NOM (Mexico), FCC Class A (Emissions), RoHS compliant, TAA Compliant
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>