


## 100-125V 12A Single-Phase Hot-Swap PDU with Manual Bypass - 6 NEMA 5-15R Outlets, 2 5-15P Inputs, 1U Rack/Wall

MODEL NUMBER: PDUB151U

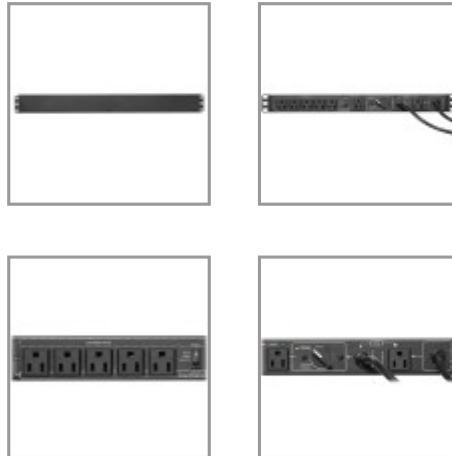

Bypass PDU maintains continuous power to connected equipment during scheduled UPS maintenance or replacement.

### Features

#### Bypass PDU Recommended for Maintaining Continuous Power During UPS Maintenance

Keeping mission-critical data center equipment operating at its optimal level often means scheduled maintenance. But what if you are unable to afford the costly downtime involved in powering down for regular upkeep? This 100-125V 12A single-phase hot-swap PDU works in conjunction with your UPS system to keep everything running 24/7/365. It allows you to manually transfer connected equipment to utility power via the PDU's bypass switch, permitting maintenance or equipment replacement with no interruption of performance.

#### Features Dual Inputs and a Manual Transfer Switch for Uninterrupted Operation

The PDUB151U includes separate UPS and utility input cables with NEMA 5-15P plugs. The manual transfer switch allows PDU output power to flow from either input. Flip the switch to Bypass to replace the UPS and flip back to Normal once the maintenance or UPS replacement is complete. Equipment connected to the six NEMA 5-15R outlets will continue to operate without interruption.

#### Optional ECO Switching Feature Enables Cost-Cutting Power Savings

By enabling the ECO power saving feature, you can power off a single bank of five controlled 5-15R outlets all at once when the device connected to the master 5-15R outlet is powered off or goes into a low-power consumption mode.

#### Mounts into 1U of Rack Space or Wall

Use the included mounting hardware to install the PDUB151U's all-metal housing into 1U of space in an EIA-standard 19-inch rack. You may also use the mounting brackets to secure the PDU to a wall.

### Highlights

- Ideal for supporting critical IT equipment that require 24/7/365 uptime
- Transfers connected components to utility power with no downtime during UPS maintenance
- Dual UPS and utility input cables with NEMA 5-15P plugs deliver AC power
- ECO mode saves power by shutting down controlled outlet bank in certain conditions
- Mounts into 1U of rack space or onto wall using included mounting hardware

### Applications

- Set the bypass switch to UPS during normal operation, so connected equipment can receive fulltime conditioned power
- Set the bypass switch to Utility to bypass the UPS and provide connected equipment with unfiltered power during UPS maintenance or replacement
- Enable ECO Switching to save power by shutting down one load bank when the device connected to the master outlet is powered off or in low-consumption mode

### Package Includes

- PDUB151U 100-125V 15A Single-Phase Hot-Swap PDU



- Mounting hardware
- Owner's manual

## Specifications

| OVERVIEW                          |  |
|-----------------------------------|--|
| UPC Code                          | 037332253071   |
| PDU Type                          | Hot-Swap   |
| INPUT                             |  |
| PDU Input Voltage                 | 100-125V   |
| Recommended Electrical Service    | Works with most 100-125V UPS systems up to 1500VA  |
| Maximum Input Amps                | 12   |
| PDU Plug Type                     | (2) NEMA 5-15P   |
| Input Cord Length Details         | Utility input cable (10 ft / 3m) / UPS input cable (4 ft / 1.2m)   |
| Input Phase                       | Single-Phase   |
| OUTPUT                            |  |
| Output Capacity Details           | 1.52kW (125V), 1.44kW (120V), 1.2kW (100V) / 15A total capacity (Agency de-rated to 12A); 12A max per 5-15R outlet   |
| Frequency Compatibility           | 50 / 60 Hz   |
| Output Receptacle Details         | Set of 6 output receptacles are arranged in two groups to support the optional ECO Power-Saving feature; One MASTER-outlet provides optional current-sense capability that when enabled, automatically powers off the bank of 5 CONTROLLABLE GROUP-outlets when the device connected to the MASTER-outlet is powered off or enters a low power sleep mode consuming 20W or less ( $\pm 5W$ ) |
| Output Receptacles                | (6) 5-15R  |
| Output Nominal Voltage            | 100-125V   |
| Overload Protection               | n/a  |
| USER INTERFACE, ALERTS & CONTROLS |  |
| Front Panel LEDs                  | Front panel LEDs report UTILITY Input Power ON (green), BYPASS-MODE Switch Setting (yellow), MASTER Outlet Power ON (green), CONTROLLABLE GROUP Outlets Power ON (green)   |
| Switches                          | 2 position Manual Transfer switch offers Break-Before-Make transfer between UPS and Utility operating modes with less than 8 milliseconds (typical) transfer time; Additional switch offers ENABLE/DISABLE control of the ECO Power-Saving feature   |
| PHYSICAL                          |  |
| Form Factors Supported            | Includes installation accessories for wall mount and 1U horizontal rackmount installation in 2 or 4 post equipment racks   |
| Material of Construction          | Metal  |



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

|                                     |   |
|-------------------------------------|---|
| PDU Form Factor                     | Horizontal (1U)   |
| Shipping Dimensions (hwd / in.)     | 5.20 x 8.00 x 21.30   |
| Shipping Weight (kg)                | 3.08  |
| Unit Dimensions (hwd / cm)          | 4.39 x 43.79 x 10.01  |
| Unit Dimensions (hwd / in.)         | 1.73 x 17.24 x 3.94   |
| Unit Weight (kg)                    | 2.36  |
| Unit Weight (lbs.)                  | 5.2   |
| <b>ENVIRONMENTAL</b>                |   |
| Operating Temperature Range         | 0C ~ 40C (32F ~ 104F)   |
| Storage Temperature Range           | -30°C to +50°C (-22°F to +122°F)  |
| Relative Humidity                   | Up to 90% (non-condensing)  |
| Operating Elevation (ft.)           | Up to 10,000 ft   |
| Operating Elevation (m)             | Up to 3000 m  |
| <b>STANDARDS &amp; COMPLIANCE</b>   |   |
| Certifications                      | Tested to UL 62368-1 (USA), CAN/CSA-C22.2 No. 62368-1 (CANADA); NOM (MEXICO)  |
| Certification Details               | Approving Agency TUV RHEINLAND; Series Number (s) AG-0514; Safety Standards (Canada) CAN/CSA-C22.2 No. 62368-1-14; Safety Standards (U.S.) UL62368-1:2014 (2nd Ed); FCC/ICES Compliant CLASS A; 47 CFR FCC PART 15 SUBPART B; ICES-003:2016 (Updated 2019); RETIE |
| <b>WARRANTY</b>                     |   |
| Product Warranty Period (Worldwide) | 2-year limited warranty   |

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>