



MODEL:


PDU3XEVS6L230B

3-Phase Switched 0U Vertical PDU


- 


**415V
50/60 Hz**


3-Phase Input
- 

**NEMA L22-30P
Plug**
- 


**240V
50/60 Hz**


**Single-Phase
Output**
- 


C19
- 


C13
- 

17.3kW

Load Capacity
- 

**Touchscreen
LCD**
- 


**HTML5
Network
Interface**
- 

**0U
Rack-Mount**
- 


**Toolless
Mounting
Buttons**

- A** Multimode Load Meter
- B** C13 and C19 Outlets with Multi-Function LEDs
- C** 20A Single Pole Hydraulic Magnetic Circuit Breakers
- D** C13 and C19 Plug-Lock Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6 ft. Input Power Cord
- H** NEMA L22-30P Input Plug
- I** Durable Metal Case
- J** LX Platform Interface
- K** USB-B Port (for Direct Console Access)
- L** USB-A Ports (for EnviroSense2 Sensors)
- M** RJ45 Configuration Port
- N** Ethernet Port
- O** Network Interface Reset Button


Not Shown:
Configuration Cable,
Owner's Manual



AC Input Connection: Insert NEMA L22-30P plug into compatible utility, generator or UPS outlet.



Color Touchscreen LCD: Easily toggle between menus to monitor input current level per phase, output current per load bank and per outlet, environmental sensor data and network information. It also generates a unique QR code to allow access to the switchable PDU through a mobile device.

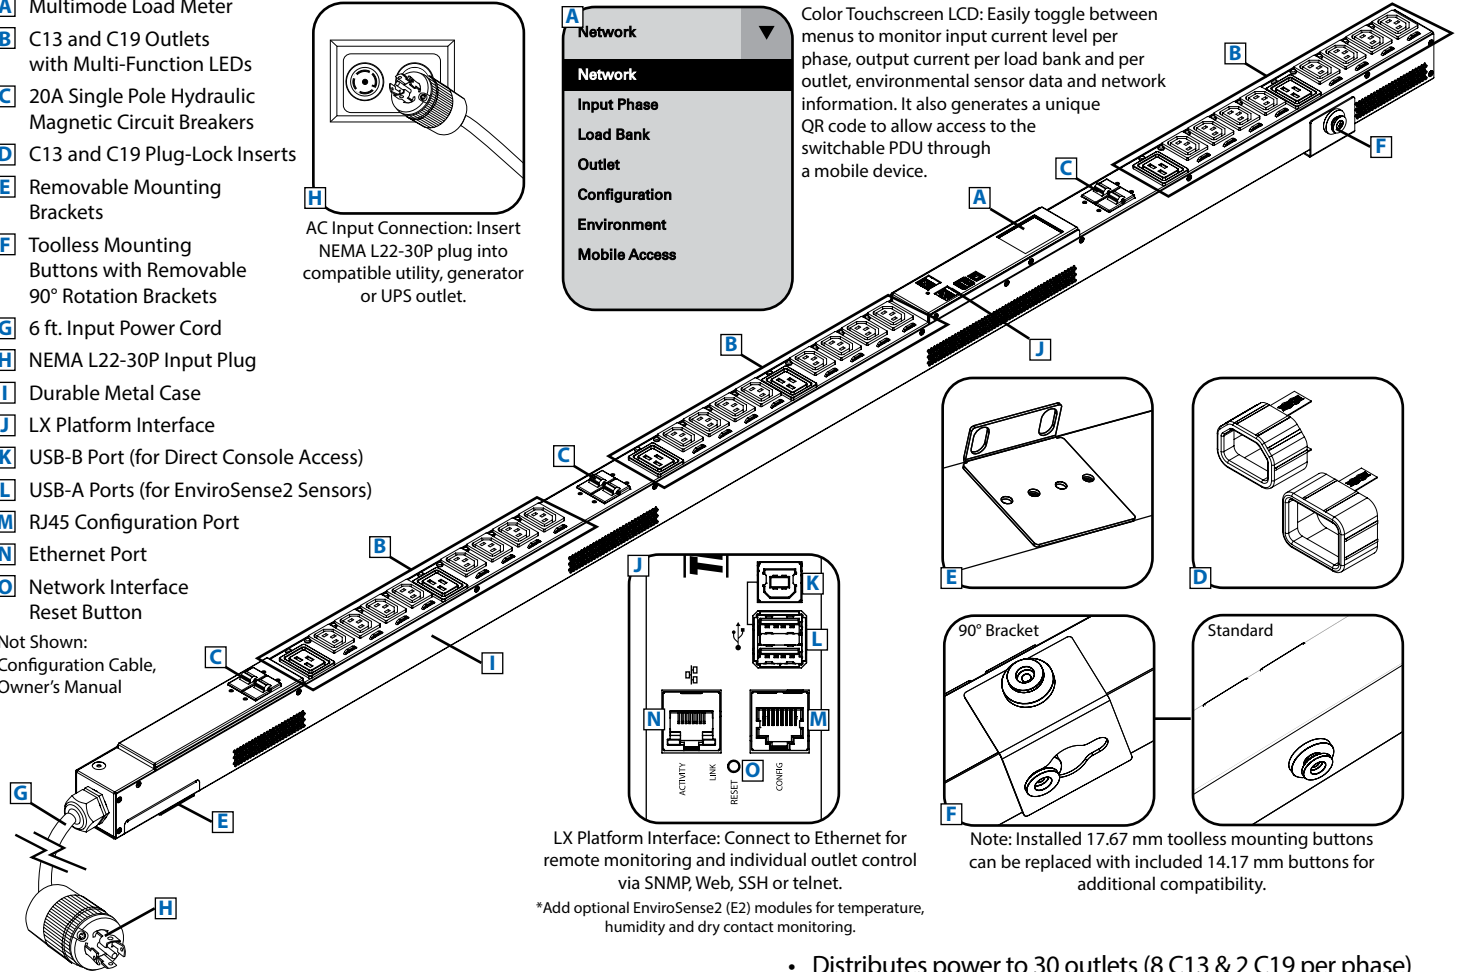

LX Platform Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web, SSH or telnet.

*Add optional EnviroSense2 (E2) modules for temperature, humidity and dry contact monitoring.

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Model	PDU3XEVS6L230B
Voltage	415V (3-Phase Input/Single-Phase Output)
Frequency	50 / 60 Hz
Load Capacity	17.3kW (415/240V)
Input Plug	NEMA L22-30P
Input Cord Length	6 ft. / 1.8 m
Outlets	30 (24 C13 / 6 C19)
Primary Mounting Option	0U (Vertical) Rack-Mount
Unit Dimensions (H x W x D)	70 x 2.17 x 2.52 in. / 1778 x 55 x 64 mm
Unit Weight	17.3 lb. / 7.8 kg
Standards	Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.









- Distributes power to 30 outlets (8 C13 & 2 C19 per phase)
- Java-free, HTML5-based network interface allows for remote monitoring and control via SNMP, Web, SSH or telnet
- Reports current for each **phase, bank, and outlet** in real-time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

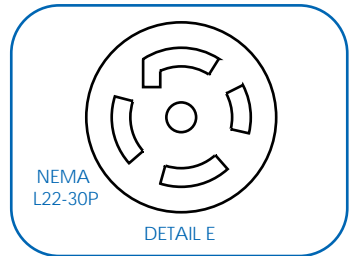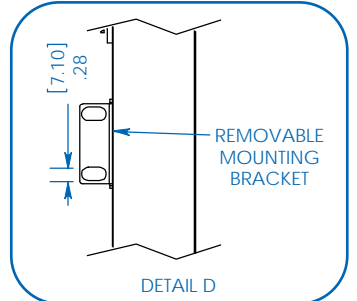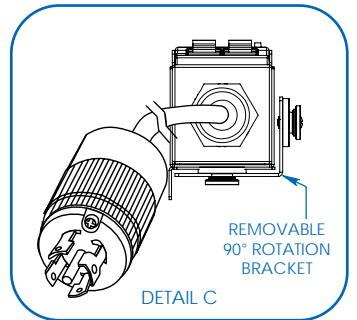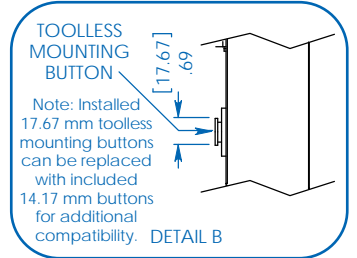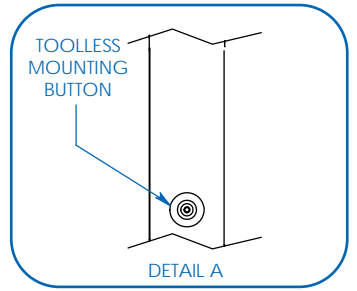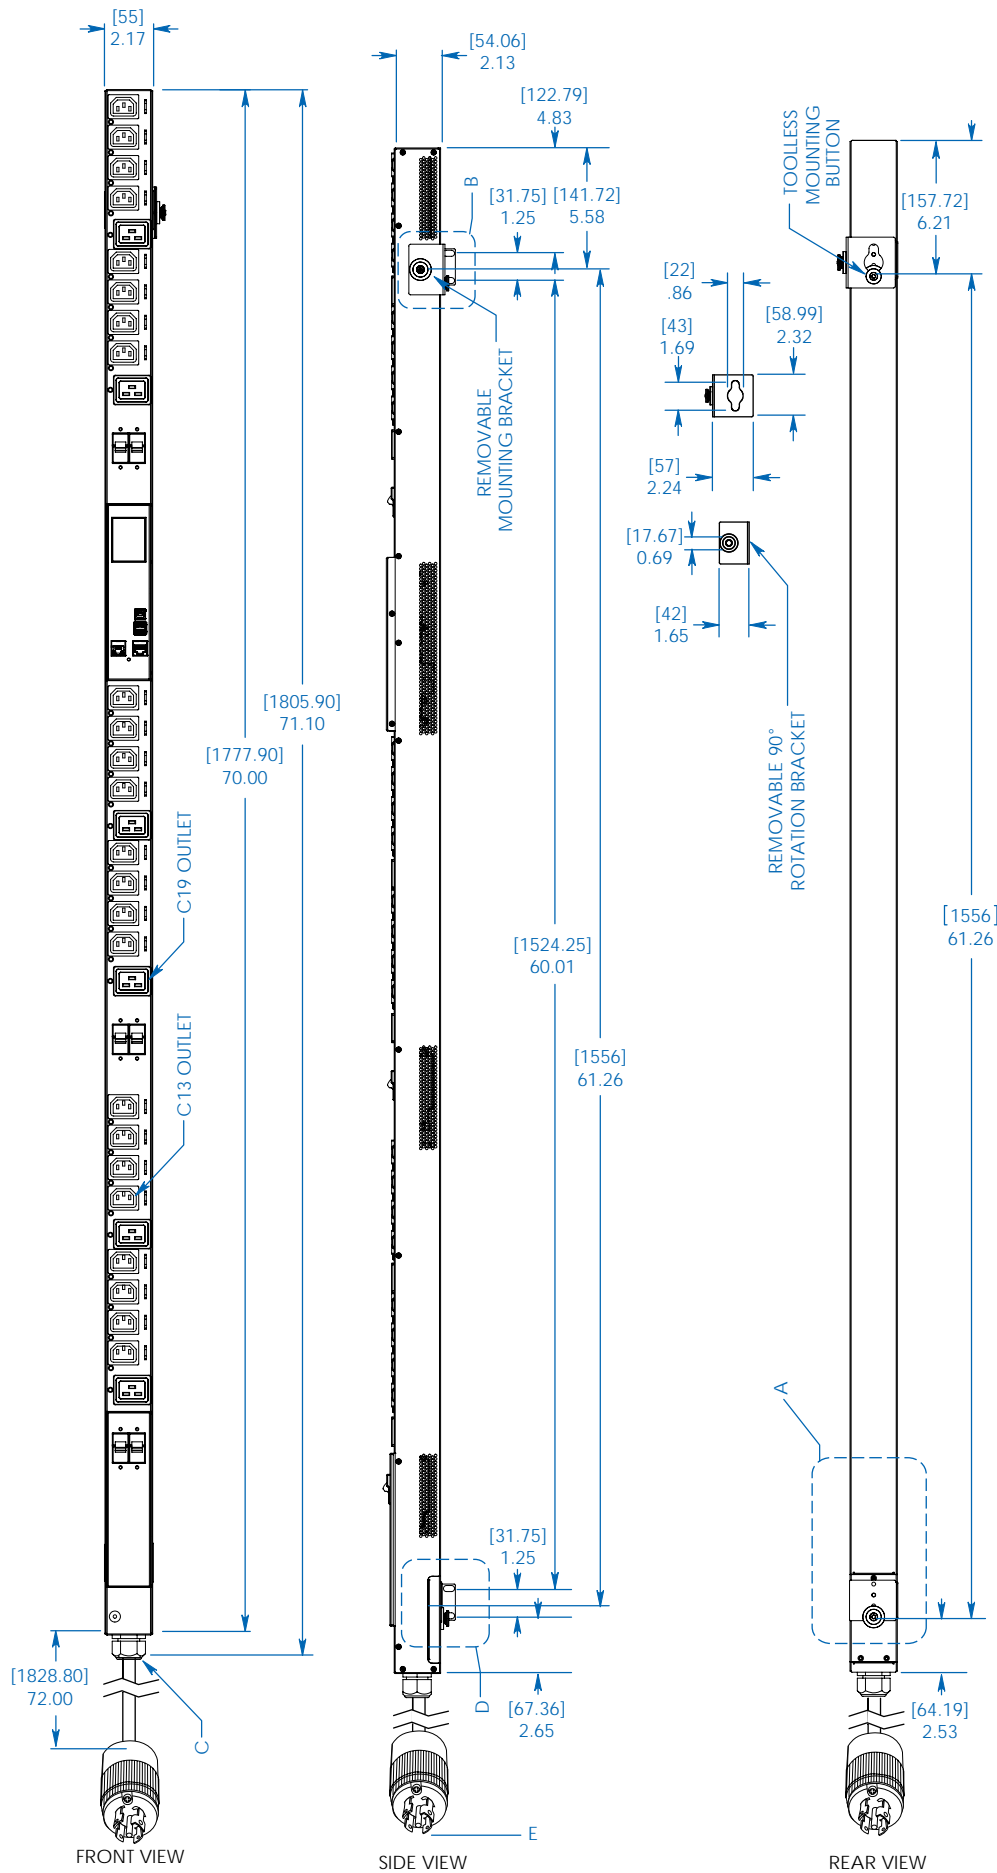

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.

MODEL:
PDU3XEVSRL230B



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234

www.tripplite.com