


11.5kW 3-Phase Local Metered PDU, 208-240V Outlets (36 C13 & 9 C19), L22-20P 360-415V Input, 6 ft. (1.83 m) Cord, 0U Vertical, TAA

MODEL NUMBER: PDU3XMV6L2220

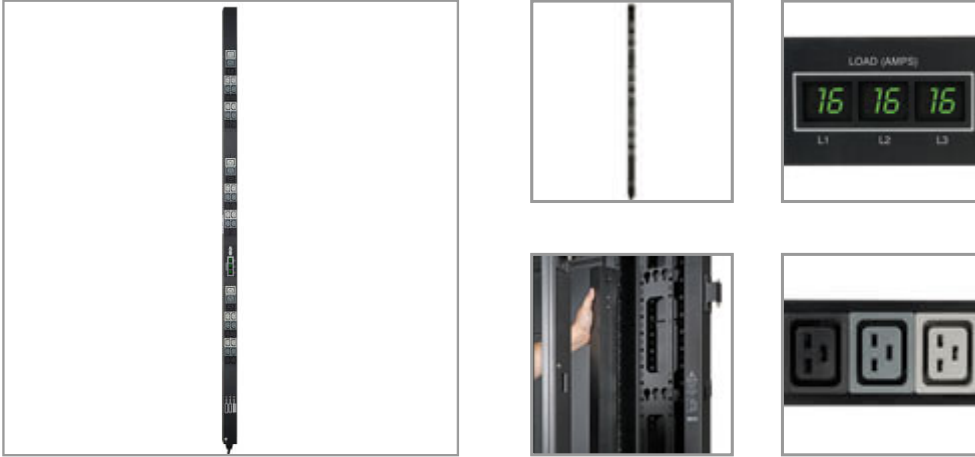

Features

- 11.5 kW Local Metered Power Distribution Unit (PDU)
- 360-415V input with NEMA L22-20P 3-phase input connection
- 208-240V output with 36 C13 & 9 C19 single phase output receptacles
- 0U / 1778mm vertical rackmount installation supported
- Outlets are arranged in 3 local metered 15 outlet load banks
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)
- Federal Trade Agreements Act / TAA Compliant for GSA Schedule purchases

Highlights

- Local metered 11.5kW 3-Phase 360-415V input / 208-240V output PDU
- Set of 3 digital meters report output load level per phase in amps
- 70in / 1778mm 0U vertical format, toolless button-mount installation
- NEMA L22-20P 3 phase input; 6ft 1.8m line cord
- 36 C13 and 9 C19 single phase outlets; Included cord retention brackets
- TAA Compliant

Package Includes

- Local Metered rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual

Specifications

OVERVIEW	
UPC Code	037332171955
PDU Type	Local Metered
INPUT	
Input Phase	3-Phase
PDU Input Voltage	360-415V
Recommended Electrical Service	Three-phase 20A 360-415V service
Maximum Input Amps	16



Powering Business Worldwide



Maximum Input Amps Details	Agency de-rated to 16A continuous
PDU Plug Type	NEMA L22-20P
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
OUTPUT	
Output Capacity Details	11.5kW (415/240V), 11kW (400/230V), 10.6kW (380/220V), 10kW (360/208V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(36) C13; (9) C19
Output Nominal Voltage	208-240V
USER INTERFACE, ALERTS & CONTROLS	
Reported Load Segments	Supports local monitoring of current for each output phase (16A balanced max per output load banks L1, L2 & L3); Outlets are color-coded and labeled for easy phase and load bank identification; L1-N feeds black outlets; L2-N feeds dark-gray outlets; L3-N feeds light-gray outlets
Front Panel LCD Display	Set of 3 digital meters report per-phase output current in amps (L1, L2, L3)
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	5.10 x 6.70 x 76.00
Shipping Dimensions (hwd / cm)	12.95 x 17.02 x 193.04
Shipping Weight (lbs.)	11.50
Shipping Weight (kg)	5.22
Unit Dimensions (hwd / in.)	70.000 x 2.200 x 1.930
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.9
Unit Weight (lbs.)	8.00
Unit Weight (kg)	3.63
ENVIRONMENTAL	
Operating Temperature Range	0C ~ 40C (32F ~ 104F)
Storage Temperature Range	-30°C to +50°C (-22°F to +122°F)
Relative Humidity	5-95% non-condensing
Operating Elevation	0-10,000



Powering Business Worldwide



WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.